
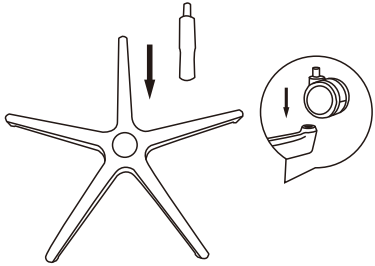
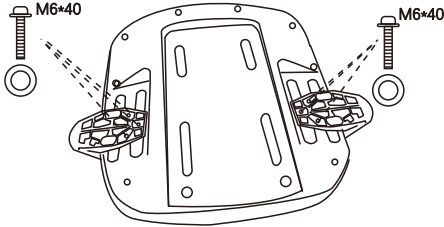
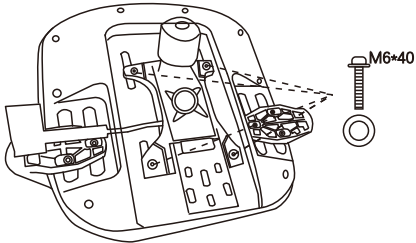





User Manual







Assemble Introduction

1 	2 
Put the castor into the base by pressing. Insert the gas lift to the base.	Fix the armrest to the seat cushion with 6pcs (M6*40) screws and 6pcs shims.
3 	4 
Fix the mechanism to the seat cushion with 4pcs (M6*40) screws and 4pcs shims.	Fix the back plate to the seat cushion with 3pcs (M8*20) screws.
5 	6 
Put the mechanism into the gas lift.	Place the bead into the groove. Then, insert the headrest into the backrest and secure the headrest attachment to the bottom of headrest with 2pcs (M4*16) screws.

Model: **DARBY**

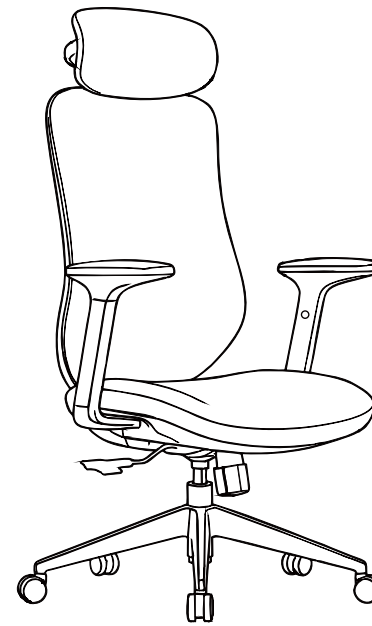

Parts list

				
Castor: 5pcs	Base: 1pc	Gas lift: 1pc	Armrest: 1 pair	Seat cushion: 1pc
				
Backrest: 1pc	Headrest: 1pc	Mechanism: 1pc	Hex wrench: 1pc	Shim: 10pcs
				
M6*40	M6*40	M8*20		
Armrest screws: 6pcs	Mechanism screws: 4pcs	Back plate screws: 3pcs	Bead: 1pc	
Please classify and measure screw lengths before installation for easy assembly.				